HAND-MARK-UP COPY

SPECIFICATION

ANTISTATIC AGENT AND RESIN COMPOSITION AND FORMED PRODUCT

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to an antistatic agent and an antistatic resin composition and an antistatic resin formed product.

2. Description of the Related Art

Plastics have excellent properties such as easy processability, high ~~productivity~~ productivity, light weight and relative low procuring cost, so they are used for the parts and structural materials for ~~automobile~~ automobile, autobicycle, scooter, television, radio, audio equipment, washing machine, rice cooker, personal computer, portable telephone, game machinery, building ~~materials~~ materials, office supplies, stationery, toys, sports goods, sports equipment, ~~agricultural~~ agricultural tools, marine tools, sheet and film.

They are usually prepared by plastic processing methods such as injection ~~molding~~ molding, blow molding, compression molding, transfer molding, rotating molding, slush molding, inflation tubular film process, and extrusion molding.

Plastic resins, especially polyethylene or polypropylene which ~~has~~ have no polar group in the molecule are strong ~~electrical~~ electrical insulating resistant, resulting ~~to generate~~ in the easy generation of ~~easily~~ the static electricity

when ~~same~~ similar or different plastic resins are rubbed, consequently they take an electrical charge.

~~And just then~~ when formed, the plastic resin ~~formed product~~ products take an electrical charge, so that they adsorb the dust in surrounding, ~~resulting~~ resulting not only to make their appearance worse but also to give uncomfortable feeling when ~~worker~~ workers or ~~user~~ users touch them.

Electrical charging sometimes becomes the cause of ignition and occasionally generates ~~the~~ ~~troubles~~ troubles of production ~~stop~~ stoppage owing to the plastic resin formed ~~product's~~ products surrounding and to the processing machine at the production step.

Also, electrical charging of the ~~plastic~~ plastic resin formed product gives a bad ~~influence~~ influence when they are printed, painted or corona discharged.

As ~~the~~ a preventing means for electrical discharging, there has been ~~practised~~ practiced ~~the~~ methods such as coating ~~the~~ a surface active agent on the surface of the ~~plastic~~ plastic mold or plastic film; mixing ~~the~~ a surface active agent by kneading into plastics; immersing the plastic product into ~~the~~ a surface active agent solution; or spraying ~~the~~ a surface active agent on the plastic product, ~~to be adhered.~~

There are many kinds of ~~the~~ surface active ~~agent~~ agents such as anionic, nonionic, cationic and amphoionic type. (compatibility

Anionic type ~~is~~ surface active agents are inferior at ~~compatibility~~ with plastics and ~~makes~~ make the ~~plastics~~ plastics product's transparency worse.

Nonionic type ~~has~~ surface active agents have better compatibility

with plastic than ~~that of~~ anionic ~~type~~, however nonionic ~~type~~ types gradually ~~Loses~~ lose ~~the~~ their antistatic effect ~~according to~~ with the passing of time and nonionic ~~types bleeds~~ types bleed out from inside of the plastic to the surface of it to cause whitening of the surface, resulting ~~to~~ in worse the product appearance.

Cationic and amphoionic type surface active agents are ~~is infer-~~ inferior ~~ior~~ at heat resistance ~~to cause~~ ~~colouring~~ causing coloring ~~ing~~ notwithstanding ~~its~~ their good antistatic effect.

The above mentioned problems of each surface active agent are expected to improve.

An antistatic agent containing ~~the~~ a organic boron compound is disclosed in the Japanese Laid-open Patent 4-252287, the organic boron compound which is ~~obtained~~ ~~ained~~ by reacting an alcohol residual group containg compound having two adjacent hydroxyl ~~groups~~ groups with boric acid or borate ester.

The organic boron compound ~~is pointed~~ overcomes ~~its defect of~~ short durable terms of antistatic effect and whitening of the surface ~~face~~ of plastic molded product by ~~bleeding~~ bleeding of the organic boron compound.

SUMMARY OF THE INVENTION

As a result of diligent ivestigation by the present invention under such situation ~~uation~~, the present invention provides an antistatic agent ~~characterized by containing~~ which contains a borate ester of polyoxyalkylene,

and an antistatic plastic resin composition, and an antistatic plastic resin formed product.

DETAILED DESCRIPTION OF THE INVENTION

A borate ester of polyoxyalkylene used for the present invention is a chemical compound expressed by the following general formula (1).

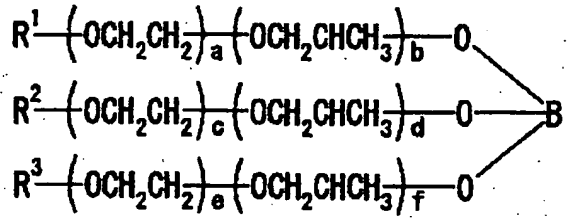

(1)

wherein R^1, R^2 and R^3 are independently selected from the group consisting of hydrogen and hydrocarbon groups, a, b, c, d, e and f are positive integers independently selected from 0 to 30 whose sum is from 6 to 80.

Examples of the hydrocarbon group are alkyl groups such as methyl, ethyl, propyl, isopropyl, butyl, pentyl, hexyl, octyl, nonyl, decyl, dodecyl, hexadecyl, octadecyl and docosyl groups and phenyl, tolyl and cyclohexyl groups.

Illustrative of the borate ester of polyoxyalkylene are the chemical compounds expressed by the following chemical formula from (2) to (27).

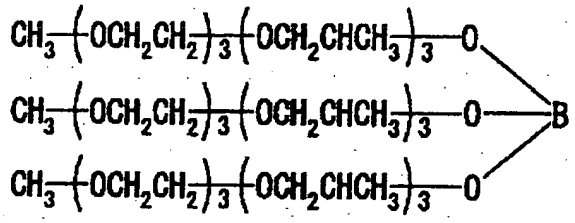

(2)

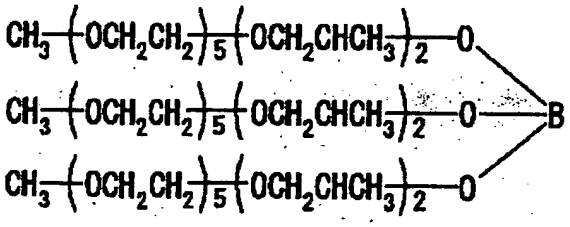

(3)

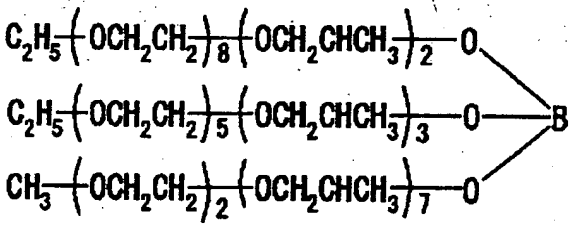

(4)

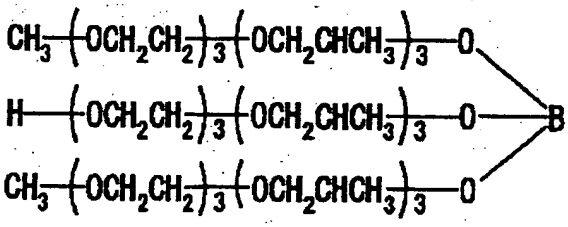

(5)

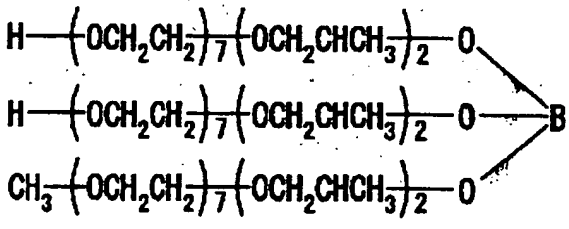

(6)

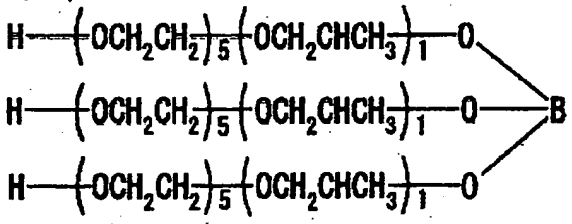

(7)

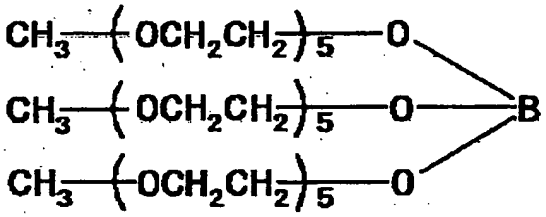

(8)

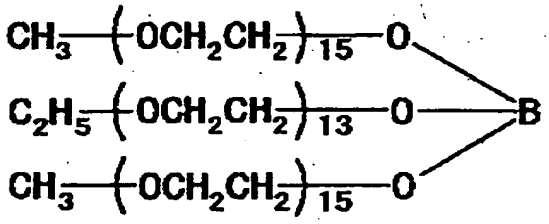

(9)

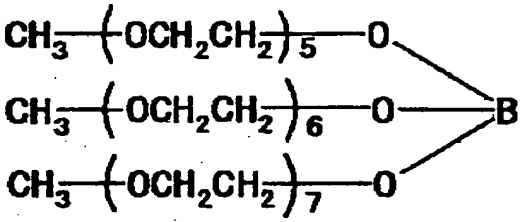

(10)

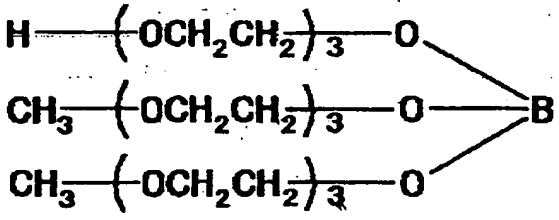

(11)

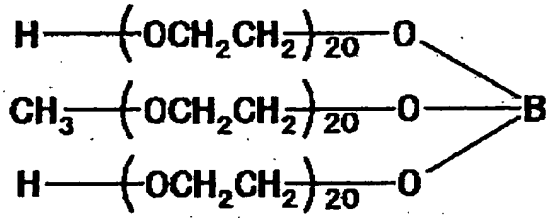

(12)

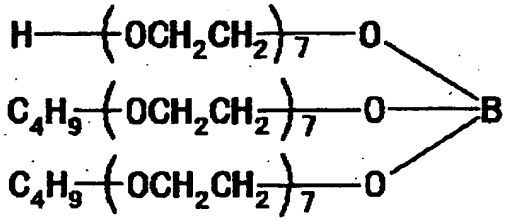

(13)

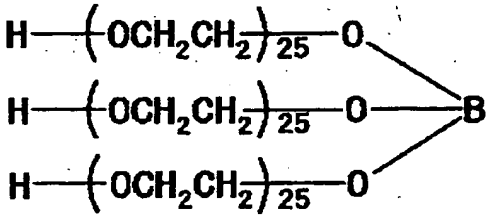

(14)

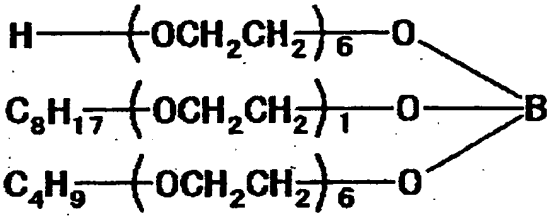

(15)

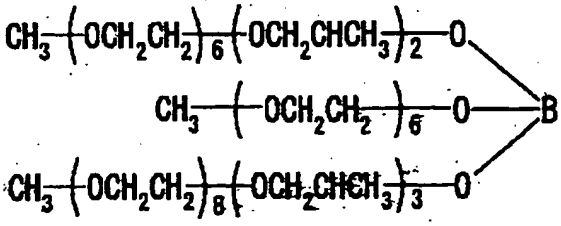

(16)

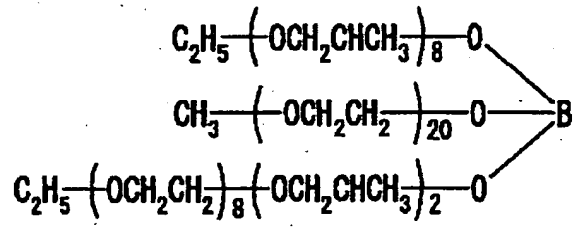

(17)

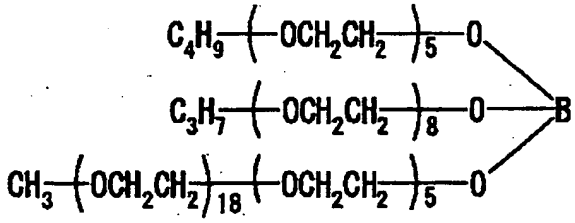

(18)

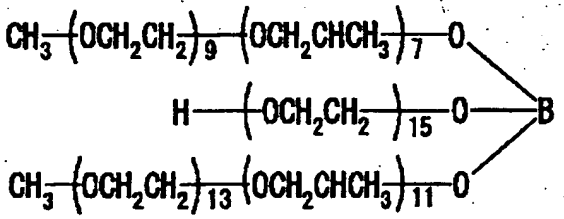

(19)

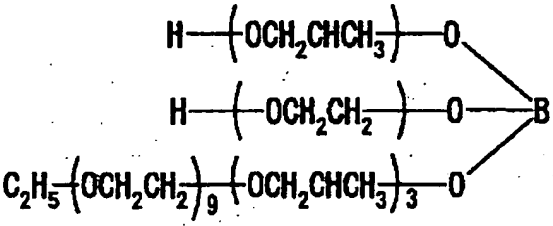

(20)

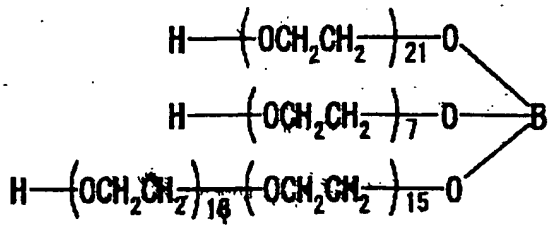

(21)

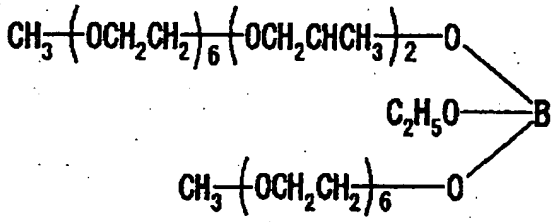

(22)

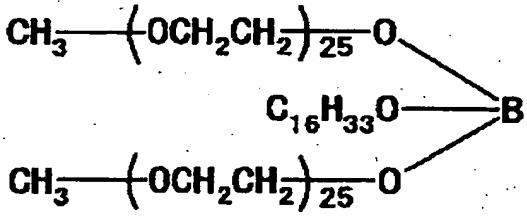

(23)

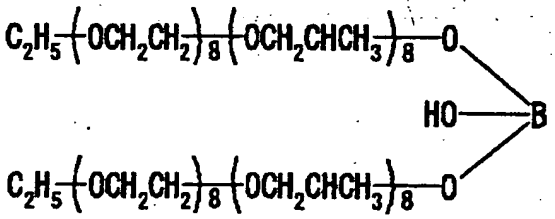

(24)

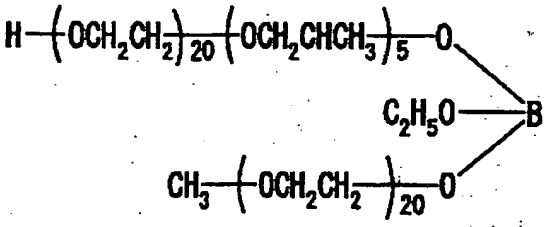

(25)

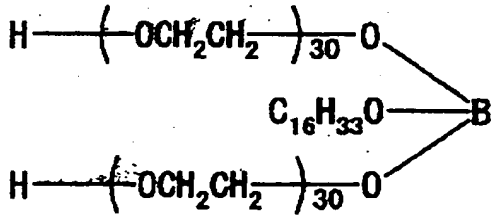

(26)

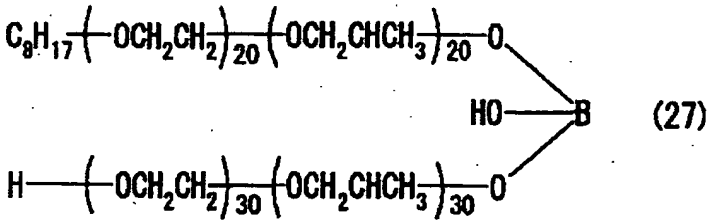

(27)

Production method for borate esters of polyoxyalkylene used for the present invention are not limited to specific methods, however following method is preferable.

The borate esters of polyoxyalkylene are produced by esterification — dehydration or ester-exchange reaction by contacting the polyoxyalkylene expressed by the chemical formula (28) with boric acid or borate esters of lower alcohols such as methyl alcohol or ethyl alcohol.

It is preferable that reaction be carried out by using 1 mol of boric acid or borate esters of lower alcohol with from 3 to 3.5 moles of polyoxyalkylene expressed by the chemical formula (28).

If the mole ratio is less than 3, it is not preferable because undesirable byproducts of borate esters having two or three boron atoms are generated.

The other byproducts or unreacted polyoxalkylene may remain in the borate esters so long as they do not hinder the purging effect of the resin composition of the present invention.

$$R^1(OCH_2CH_2)_a(OCH_2CHCH_3)_bOR^2 \quad (28)$$

wherein R^1 and R^2 are independently selected from the group consisting of hydrogen and hydrocarbon group, a and b are independently selected from 0 to 30.

Examples of the hydrocarbon groups are alkyl group such as methyl, ethyl, propyl, isopropyl, butyl, pentyl, hexyl, octyl, nonyl, decyl, dodecyl, hexadecyl, octadecyl and docosyl groups and phenyl, tolyl and cyclohexyl group.

Examples of the polyoxyalkylene expressed by the chemical formula (28) are as follows.

diethylene glycol monomethyl ether,
diethylene glycol monoethyl ether,
diethylene glycol monoisopropyl ether,
diethylene glycol monobuthyl ether,
diethylene glycol monooctyl ether,
diethylene glycol monodecyl ether,
diethylene glycol monohexadecyl ether,
diethylene glycol monooctadecyl ether,

triethylene glycol monomethyl ether,
triethylene glycol monoethyl ether,
triethylene glycol monoisopropyl ether,
triethylene glycol monobuthyl ether,
triethylene glycol monobuthyl ether,
triethylene glycol monooctyl ether,
triethylene glycol monodecyl ether,
triethylene glycol monohexadecyl ether,
triethylene glycol monooctadecyl ether,

tetraethylene glycol monomethyl ether,
tetraethylene glycol monoethyl ether,
tetraethylene glycol monoisopropyl ether,
tetraethylene glycol monobuthyl ether,

tetraethylene glycol monooctyl ether,
tetraethylene glycol monodecyl ether,
tetraethylene glycol monohexadecyl ether,
tetraethylene glycol monooctadecyl ether,

polyethylene glycol monomethyl ether,
polyethylene glycol monoethyl ether,
polyethylene glycol monoisopropyl ether,
polyethylene glycol monobuthyl ether,
polyethylene glycol monooctyl ether,
polyethylene glycol monodecyl ether,
polyethylene glycol monohexadecyl ether,
polyethylene glycol monooctadecyl ether,

dipropylene glycol monomethyl ether,
dipropylene glycol monoethyl ether,
dipropylene glycol monoisopropyl ether,
dipropylene glycol monobuthyl ether,
dipropylene glycol monooctyl ether,
dipropylene glycol monodecyl ether,
dipropylene glycol monohexadecyl ether,
dipropylene glycol monooctadecyl ether,

tripropylene glycol monomethyl ether,
tripropylene glycol monoethyl ether,
tripropylene glycol monoisopropyl ether,
tripropylene glycol monobuthyl ether,
tripropylene glycol monooctyl ether,
tripropylene glycol monodecyl ether,
tripropylene glycol monohexadecyl ether,
tripropylene glycol monooctadecyl ether,

tetrapropylene glycol monomethyl ether,
tetrapropylene glycol monoethyl ether,
tetrapropylene glycol monoisopropyl
ether,

tetrapropylene glycol monobuthyl ether,
tetrapropylene glycol monoocthyl ether,
tetrapropylene glycol monodecyl ether,
tetrapropylene glycol monohexadecyl ether,
tetrapropylene glycol monooctadecyl ether,

polypropylene glycol monomethyl ether,
polypropylene glycol monoethyl ether,
polypropylene glycol monoisopropyl ether,
polypropylene glycol monobuthyl ether,
polypropylene glycol monoocthyl ether,
polypropylene glycol monodecyl ether,
polypropylene glycol monohexadecyl ether,
polypropylene glycol monooctadecyl ether,

diethyleneglycol tripropyleneglycol monomethyl ether,
tetraethyleneglycol dipropyleneglycol monomethyl ~~mether~~ ether,
tetraethyleneglycol tripropyleneglycol monomethyl ether,
tetraethyleneglycol tetrapropyleneglycol monomethyl ether,
pentaethyleneglycol dipropyleneglycol monomethyl ether,
pentaethyleneglycol tripropyleneglycol monomethyl ether,
diethyleneglycol tetrapropyleneglycol monomethyl ether,

hexaethyleneglycol dipropyleneglycol monomethyl ether,
hexaethyleneglycol dipropyleneglycol monomethyl ~~mether~~ ether,

hexaethyleneglycol tripropyleneglycol monomethyl ether,
hexaethyleneglycol tetrapropyleneglycol monomethyl ether,
hexaethyleneglycol pentapropyleneglycol monomethyl ether,
hexaethyleneglycol hexapropyleneglycol monomethyl ether,

heptaethyleneglycol dipropyleneglycol monomethyl ether;
heptaethyleneglycol dipropyleneglycol monomethyl mether,
heptaethyleneglycol tripropyleneglycol monomethyl ether,
heptaethyleneglycol tetrapropyleneglycol monomethyl ether,
heptaethyleneglycol pentapropyleneglycol monomethyl ether,
heptaaethyleneglycol hexapropyleneglycol monomethyl ether,
heptaaethyleneglycol ~~heptapropyleneglycol~~ heptapropyleneglycol monomethyl ether,

octaethyleneglycol dipropyleneglycol monomethyl ether,
octaethyleneglycol tripropyleneglycol monomethyl ~~mether~~ ether,
octaethyleneglycol tetrapropyleneglycol monomethyl ether,
octaethyleneglycol pentapropyleneglycol monomethyl ether,
octaethyleneglycol hexapropyleneglycol monomethyl ether,
octaethyleneglycol heptapropyleneglycol monomethyl ether,

polyethyleneglycol polypropyleneglycol monomethyl ether,

triethylene glycol ,
tetraethylene glycol ,
pentaethylene glycol ,
hexaethylene glycol ,
heptaethylene glycol ,
octaethylene glycol ,
decaethylene glycol ,
tridecaethylene glycol ,
hexadecaethylene glycol ,
eicosaethylene glycol ,
pentacosaethylene glycol ,
triacosaethylene glycol ,

tripropylene glycol ,
tetpropylene glycol ,
pentapropylene glycol ,
hexapropylene glycol ,
heptapropylene glycol ,
octapropylene glycol ,
decapropylene glycol ,
tridecapropylene glycol ,
hexadecapropylene glycol ,
eicosapropylene glycol ,
pentacosapropylene glycol ,
triacosapropylene glycol ,

triethylene glycol tripropylene glycol,
tetraethylene glycol dipropylene glycol,
tetraethylene glycol tripropylene glycol,
tetraethylene glycol tetrapropylene glycol,
pentaethylene glycol dipropylene glycol,
pentaethylene glycol tripropylene glycol,

hexaethylene glycol dipropylene glycol,
hexaethylene glycol tripropylene glycol,
hexaethylene glycol pentapropylene glycol,
hexaethylene glycol hexapropylene glycol,
heptaethylene glycol dipropylene glycol,
triacosaethylene glycol dipropylene glycol,

heptaethylene glycol tripropylene glycol,
heptaethylene glycol tetrapropylene glycol,
heptaethylene glycol pentapropylene glycol,
heptaethylene glycol hexapropylene glycol,
heptaethylene glycol heptapropylene glycol,

octaethylene glycol dipropylene glycol,
octaethylene glycol tripropylene glycol,
octaethylene glycol tetrapropylene glycol,
octaethylene glycol pentapropylene glycol,
octaethylene glycol hexapropylene glycol,
octaethylene glycol pentapropylene glycol,
octaethylene glycol octapropylene glycol,
polyethylene glycol polypropylene glycol,

tripropylene glycol triethylene glycol monomethyl ether,
tetrapropylene glycol diethylene glycol monomethyl ether,
tetrapropylene glycol triethylene glycol

monomethyl ether,
tetrapropylene glycol tetraethylene glycol monomethyl ether,
pentapropylene glycol diethylene glycol monomethyl ether,
pentapropylene glycol triethylene glycol monomethyl ether,
pentapropylene glycol tetraethylene glycol monomethyl ether,

hexapropylene glycol diethylene glycol monomethyl ether,
hexapropylene glycol triethylene glycol monomethyl ether,
hexapropylene glycol tetraethylene glycol monomethyl ether,
hexapropylene glycol pentaethylene glycol monomethyl ether,
hexapropylene glycol hexaethylene glycol monomethyl ether,

heptapropylene glycol diethylene glycol monomethyl ether,
heptapropylene glycol triethylene glycol monomethyl ether,
heptapropylene glycol tetraethylene glycol monomethyl ether,
heptapropylene glycol pentaethylene glycol monomethyl ether,
heptapropylene glycol hexaethylene glycol monomethyl ether,
heptapropylene glycol heptaethylene glycol monomethyl ether

octapropylene glycol diethylene glycol monomethyl ether,

octapropylene glycol triethylene glycol monomethyl ether,
octapropylene glycol tetraethylene glycol monomethyl ether,
octapropylene glycol pentaethylene glycol monomethyl ether,
octapropylene glycol hexaethylene glycol monomethyl ether,
octapropylene glycol heptaethylene glycol monomethyl ether
octapropylene glycol octaethylene glycol monomethyl ether
polypropylene glycol polyethylene glycol monomethyl ether

tripropylene glycol triethylene glycol monomethyl ether,
tetrapropylene glycol triethylene glycol monomethyl ether,
tripropylene glycol triethylene glycol monomethyl ether,
octapropylene glycol diethylene glycol monomethyl ether,

octaethylene glycol dipropylene glycol monomethyl ether,
octaethylene glycol tripropylene glycol monomethyl ether,
octaethylene glycol tetrapropylene glycol monomethyl ether,
octaethylene glycol pentapropylene glycol monomethyl ether,
octaethylene glycol hexapropylene glycol monomethyl ether,
octaethylene glycol heptapropylene glycol monomethyl ether,

octaethylene glycol octapropylene glycol monomethyl ether,
polyethylene glycol polypropylene glycol monomethyl ether.

A solvent or diluent may be incorporated into the raw materials such as boric acid, borate ester of lower alcohols and polyoxyalkylene, or into borate esters of glycol ether.

If a solvent or diluent are employed, they must not disturb the esterification-dehydration or ester-exchange reaction and their boiling points should preferable be below the boiling point of the byproducts or polyoxyalkylenes.

Examples of the solvents or diluents are ethers such as diethyl ether, dioxane, tetrahydrofran; aliphatic hydrocarbons such as hexane, acetic anhydride, heptane, octane, nonane, decane, undecane; aromatic hydrocarbons such as benzene, toluene, xylene; cycloalkanes such as cyclohexane, cyclohexene; non-proton polar compounds such as dimethy formamide, dimethyl sulfoxide, hexamethyl polyamide phosphate, acetonitrile, N-methyl pyrrolidone; and their chlorine substituted compounds such as chloroform and carbon tetrachloride.

A catalyst for the esterification-dehydration or ester-exchange reaction may be used.

If a catalyst is necessary for condensation promoting the reaction, following condensation catalysts are recommended.

Examples of the catalysts are metallic

salts acids octanoate

~~salt~~ of organic ~~acid~~ such as ferrous ~~oc-~~ ~~tanoate~~, ferrous naphthenate, cobaltous stannum naphthenate, manganese octanoate, ~~stann-~~ ~~um~~ octanoate, stannum naphthenate, lead octanoate, lead naphthenate, organotin ~~compound~~ compounds such as dibuthy tin diacetate, dibuthyl tin dioctanoate, dibutyl tin dilaurate, dibutyl tin dioleate, dibutyl tin dimethoxide, oxidized dibutyl tin; metal ~~alcoholate~~ alcoholates such as tetrabuthyl titanate, tetrabutyl zirconate; titanium ~~chelate~~ chelates such as di-isopropoxy bis-acetyl acetonate titanium, 1, 3-propanedioxy 3-propanedioxy bis-ethylacetonate titanium, 1, ~~3-propa-~~ ~~nedioxy~~ bis-ethylacetoacenate titanium; ~~alminum~~ aluminum ~~chelate~~ chelates such as ~~alminum~~ aluminum ~~acethyl-~~ ~~acetonate~~, ~~alminum~~ aluminum tris-ethylacetoaceto-nate; amines such as hexyl amine, ~~dodec-~~ dodecylamine ~~ylamin~~e phosphate, dimethyl hydroxyamine, diethyl hydroxyamine; tetra-ammonium ~~salt~~ salts such as benzyl hydroxyamine; ~~inorg-~~ ~~anic~~ inorganic ~~acid~~ acids such as hydrochlonic acid, nitric acid, sulfric acid, phosphoric acid; ~~organic acid~~ organic acids such as acetic ~~anhyd-~~ ~~ride~~ anhydride, pure acetic acid (over 99.8%), ~~pro-~~ ~~pionic~~ propionic acid, citric acid, benzoic acid, formic acid, acetic acid, oxalic acid, p-toluenesulfonic acid; ~~chlorosilane~~ chlorosilanes such as methyl tri-chlorosilane, ~~dimeth-~~ ~~yl~~ dimethyl di-chlorosilane; inorganic ~~base~~ bases such as aqueous ammonia; organic ~~base~~ bases such as ethylene diamine, tri-ethanol amine; and amino alkylamine.

It is preferable that the ~~esterification~~ esterification-dehydration or ester-exchange ~~reaction~~ reaction is carried out under the ~~condition~~ conditions

of ~~a~~ reduced or atmospheric pressure, from 50 to 250℃ temperature, ~~favourably~~ and preferably from 100 to 180℃.

~~Under~~ During the reaction, removal of ~~byprod-~~ ~~uets~~ such as lower alcohol (alcohols) or water can proceed the reaction easily because ~~rem-~~ ~~oval~~ removal of byproducts ~~proceed~~ (proceeds) the reaction equilibrium to ~~favorable direction of~~ (favor) formation borate ester ~~of polyoxyalkylenes~~ ~~formation~~ of polyoxyalkylene.

As to the removal method, azeotropic distillation using azeotropic agent and batch or continuous distillation using distillation tower are preferable.

For the purpose of improving the ~~properties~~ properties of the borate ester of ~~polyoxyalkylenes~~ polyoxyalkylenes, amino-group containing ~~compound~~ compounds and/or ~~solvent~~ solvents may be added to ~~said borate~~ the borate esters of polyoxyalkylenes.

Adding the amino-group containing ~~compound~~ compound to the borate ~~ester~~ esters of ~~polyoxyalkylenes~~ polyoxyalkylenes ~~exhibits the suppressing~~ causes suppression of ~~borate~~ borate ester hydrolysis and also ~~exhibits~~ a rust preventive effect under the ~~condition~~ conduction of existense of water or its vapor.

Examples of the amino-group containing compound include alkylamine, cyclo alkyl amine, alkanol amine, heterocyclic amine, diamine, lactam, cyclic imide and ~~poly-~~ ~~amine~~ polyamine, which may be used alone or ~~combination~~ combinations ~~selecting from these compound.~~

As the alkyl amine, there can be used methyl amine, dimethyl amine, trimethyl amine, ethyl amine, diethyl amine, ~~tri-~~ ~~ethyl~~ triethyl amine, propyl amine, N, N-di[poly(4) oxyethyl] hexadecyl amine, dodecyl ~~dime-~~ dimethyl

thyl amine, stearamide propyl dimethyl amine, polyoxyethylene (3-30) octadecyl amine, polyoxyethylene (3-30) laurylamine, polyoxyethylene (3-30) oleyl amine, polyoxyethylene (3-30) dilauryl amine, polyoxyethylene (3-30) stearyl amine, polyoxyethylene (3-30) alkylamine, polyoxyethylene (3-30) dialkyl amine, and di (oleoyloxyethyl) hydroxy amine.

As the cycloalkyl amine, there can be used cyclohexyl amine, methyl cyclohexyl amine and ethyl cyclohexyl amine.

As the alkanol amine, there can be used ethanol amine, diethyl hydroxy methyl amine, diethanol amine, dimethyl aminoethanol, triethanol amine, propanolamine, dimethy 2-hydroxypropyl amine, buthanol amine, methyldi (2-hydroxyethyl) amine, tri (2-hydroxyethyl) amine, hydroxymethyl di (2-hydroxyethyl) amine, dibenzil 2-hydroxypropyl amine and cyclohexyl di 2-hydroxyethyl amine.

As the cycloalkanol amine, there can be used cyclohexanol amine, methylcyclohexanol amine and ethylcyclohexanol amine.

As the heterocyclic amine, there can be used used pyridine, lutidine, 3, 4-xylidine, piperidine, N-methyl piperidine and N-ethyl piperidine.

As the lactam, there can be used proio lactam, N-methylpropyo lactam, N-ethyl butyro lactam, N-methyl varero lactam, N-methyl caprolactam and phenyl caprolactam.

As the cyclic imide, there can be used

succinimide, N-methyl succinimide, N-ethyl succinimide, phenyl succinimide and 2-undecyl imidazoline.

As the diamine, there can be used ethylene diamine, triethylene diamine and tetraethylene diamine.

As the polyamine, there can be used diethylene triamine, triethylene tetramine and pentaethylene pentamine.

Among these amino-group containing compounds, tertiary amino-group containing compounds exhibit excellent effects of preventing hydrolysis of borate ester of polyoxyalkylene and promoting the cleaning and purging the coloured contaminates.

Examples of tertiary amino-group containing compounds having above mentioned excellent properties are polyoxyethylene (3-30) octadecyl amine, polyoxyethylene (3-30) laurylamine, polyoxyethylene (3-30) oleyl amine, polyox-yethylene (3-30) dilauryl amine, polyoxyet-hylene (3-30) stearyl amine, polyoxyethyl-ene (3-30) alkylamine, polyoxyethylene (3-30) dialkyl amine and di (oleoyloxyethyl) hydroxy amine.

The amount of amino-group containing compound to 100 parts by weight of borate ester of polyoxyalkylene is from 0 to 100 parts by weight, and preferably from 5 to 50 parts by weight and most preferably from 10 to 30 parts by weight.

Use of the solvent contributes to lower viscosity of the borate ester of polyoxyalkylene.

As the solvent, there can be used

water, methyl alcohol, ethyl alcohol, isopropyl alcohol, butyl alcohol, isopropyl ether, ether, ethylene glycol, polyethylene glycol, polyethylene dimethyl ester, diethylene glycol, triethylene glycol, ethylene glycol dimethyl ether, diethylene glycol dimethy ether, diethylene glycol diethy ether, ethylene glycol dipropyl ether, triethylene glycol dimethyl ether, triethylene glycol monobuthyl ether, diethylene glycol monobuthyl ether, diethylene glycol diethyl ether, diethylene glycol propyl ether, diethylene glycol dibuthyl ether, dimethyl ether, propylene glycol, acetone, methyethyl ketone, furfural, dioxane, methane sulfonate, diethy ether, tetra hydrofuran, hexane, acetic anhydride, heptane, octane, nonane, decane, undecane, benzene, toluene, xylene, cyclohexane, cyclohexene, dimethyl formamide, dimethy sulfoxide, hexamethyl triamide phosphate, acetonitrile, N-methyl pyrrolidone, chloroform and carbon tetrachloride. These solvents are used alone or in combination.

The amount of solvent to 100 parts by total weight of borate ester of polyoxyalkylene and amino group containing compound is from 0 to 100 parts by weight, and preferably from 5 to 50 parts by weight and most favourably from 10 to 30 parts by weight.

Ingredients preferably other than amino-group containing compounds and/or solvents may be incorporated to borate ester of

polyoxyalkylenes Improving

~~polyoxyalkylene~~ for the purpose of ~~impr-~~ ~~oving~~ the properties of cleaning and purging the resin compound of the present invention.

other ingredient

~~As the other ingredient, there~~ can be used such as ~~stabilizer~~, neutralizer, ~~antioxidant~~ antioxidant; ultraviolet absorber, light ~~stabili-~~ Stabilizers ~~zer~~, antistatic agent, lubricant, ~~proce-~~ processability ~~ssability~~ improving agent, filler, ~~dis-~~ dispersing ~~ersing~~ agent, coupling agent, ~~anticopper~~ anti-copper rusting agent, blowing agent, nuclear forming agent, ~~antiforming~~ anti-foaming agent, ~~defor-~~ determers ~~mer~~, ~~colourant~~ Colorants, pigment, dyeing agent, carbon black, water tree preventing agent, voltage stabilizer, ~~antitracking~~ anti-tracking agent, organic peroxide, crosslinking agent, disinfectant, antiseptics, ~~anti-~~ ~~mold~~ antimold agent and ~~antirust~~ anti-rust agent.

The antistatic agent of the present invention is a chemical compound having the function to prevent following problems.

area surrounding

One problem is that the dusts in ~~surr-~~ ~~ounding near~~ the plastic resin formed product are adsorbed on ~~that~~ the formed products resulting not only ~~to make~~ making their appearance worse but also ~~to give~~ creating an uncomfortable feeling when ~~worker~~ workers or ~~user~~ users touch ~~es that~~ the formed products.

charging

The other problem is electrical ~~charg-~~ ~~ing to cause~~ which causes ~~of~~ ignition or production ~~stopping~~ stoppage, which is caused by ~~that~~ when the plastic resin formed ~~product~~ products ~~surrounds~~ contact ~~to the~~ parts of a processing machine at the production step.

effects influence

Another problem ~~is giving bad influen-~~ ~~ce at~~ surface treating of the plastic

products and causes problems associated with product such as printing, painting or corona discharging.

The antistatic agent of the present invention is prepared using one or more than one kind of borate esters of polyoxyalkykene polyoxyalkykenes.

The antistatic agent may contain amino group containing compounds and/or solvents. amino-group

The antistatic agent may further contain surface active agents, pigments, dyes, inorganic fillers, dripping preventable preventing agents, precipitation preventable preventing agents, antioxidants and deformers.

The antistatic agent may be filled in the an aerosol container with a propellant.

Coating of the antistatic agent of the present invention on the surface of the plastic molded products, plastic films, machines machine parts, apparatus or process machine can be conducted by brushing, spray- spraying ing, dipping of the antistatic agent; or contacting a woven cloth or a nonwoven cloth which are immersed with the antistatic agent onto the surface of the plastic molded products, plastic films, machine machine parts, apparatus and process machines.

The antistatic agent of the present invention can be heat kneaded into a plastic resin to form an antistatic plastic resin composition.

The antistatic plastic resin composition can be formed by a plastic processing machine to obtain a plastic film, sheet, bottle and or container having antistatic property properties.

The plastic resin used for the plastic

resin composition of present invention is ~~the~~ a thermoplastic resin.

As the thermoplastic resin, there can be used high density polyethylene, high pressure low density polyethylene such as HP-LDPE, EVA, EEA, Ionomer, olefin vinylalcohol copolymer, LLDPE, VLDPE, polypropylene (PP), polystylene (PS), acrylonitrile-butadiene-stylene ~~copoly-~~ copolymer ~~mer~~ (ABS), acrylonitrile-stylene copolymer (AS), acrylonitrile-butadiene copolymer, acrylonitrile acrylate-stylene copolymer, polyvinyl chloride (PVC), polyamide, ~~poly-~~ polymethylmethacrylate ~~methylmethacrylate~~ (PMMA), polyacetal (POM), aminopolyacrylamide, polyarylate, fluoro carbon resin, polyimide (PI), ~~polyamino-~~ polyaminobismaleimide ~~bismaleimide~~ (PABI), polyamideimide (PAI), polyetherimide (PEI), bismaleimidetriazine resin (BT), polysulfone, polybutylene terephthalate ~~tereph-~~ terephthalate ~~thalate~~ (PET), polyvinylidene chloride, polycarbonate (PC), polyvinyl acetate, polyvinyl alcohol, polyvinyl ether, modified ~~modifi-~~ ~~ed~~ polyvinyl formale, modified PPE, polyphenyleneoxide (PPO), polyphenylene sulfide (PPS), polyethersulfone (PESF), polyetheretherketone (PEEK), ~~poly-~~ polyarysulfone ~~arysulfo-~~ ~~ne~~ (PAS), polymethylpenten (TPX), liquid crystal polymer, silicone resin, natural rubber (NR), butyl rubber (IIR), ~~acrylonit-~~ acrylonitrile ~~rile~~ butadiene rubber (NBR), chloroprene rubber (CR), styrene butadiene rubber (SBR), butadiene rubber (BR) and the like.

Production ~~method~~ of the antistatic resin composition is not limited to ~~spe-~~ specific ~~cific~~ method; however, following method

is desirable.

To the 100 parts by weight of a thermoplastic resin, 0.1~10 parts by weight of a borate ester of glycol ether expressed by general formula (1) is added.

The form of the thermoplastic resin may be a powder or pellet form.

The borate ester of polyoxyalkylenes may be soaked into the thermoplastic resin powder or pellet.

The soaking is desirable to conduct at a temperature greater than the glass transition point to speed up the soaking

The other production method for the present antistatic resin composition of the present invention may be conducted as follows.

The thermoplastic resin and borate ester of polyoxyalkylenes are fed to plastic processing machine or bunbury mixer, in which they are blended and extruded through a pelletizing die having many holes of 3~7mm diameter.

Each of the extruded strings are cut to form pellets having a length of 3~7mm.

In case the amount of the borate ester of polyoxyalkylenes is less than 0.1 parts by weight, the resin composition for purging does not exhibit the cleaning and perging effect and having the amount of borate ester in case more than 10 % parts by weight is not desirable because a uniform polymer blend is barely obtained.

EXAMPLE

Now, an antistatic agent ~~characterized by~~ containing a borate ester of ~~polyoxyalkylene~~ polyoxyalkylene and an antistatic plastic resin composition, and an antistatic plastic resin formed product according to the present invention will be described in further detail with reference to ~~Example~~ specific examples.

However, it shoud be understood that the present invention is by no means restricted by such specific ~~Example.~~ examples

Example 1

Borate ester of polyoxyalkylenes ~~expressed~~ expressed by chemical formula (12) was ~~obtained~~ obtained by the following synthesis process.

In a 7000 ml flask equipped with three inlet ~~pipe~~ pipes and displaced by nitrogen gas were charged 146g (1 mole) of triethyl borate [$B(OC_2H_5)_3$], 1.2g of dibutyl tin dilaurate and 50 ml of benzene.

Subsequently, to the solution in the flask was added with 1796g (2 mole) of eicosaethylenglycol and 912g (1mole) of eicosaethylenglycol monomethyl ether under stirring ~~condition~~ conditions to obtain a ~~uniform~~ uniform blended solution.

Subsequently, the solution in the flask was stirred for 13 hours at 95℃ under ~~the condition of~~ conditions to distillation, to remove ethanol and benzene as the ~~byproduct~~ byproduct and to obtain 2716g (0.99 mole) of a borate ester of polyoxyalkylenes ~~expressed~~ expressed

sed by chemical formula (12).

Also, the other borate ester of polyoxyalkylenes expressed by chemical formula (23) was obtained by following synthesis process.

In a 7000 ml flask equipped with three inlet pipes and displaced by nitrogen gas were charged 2264g (2 mole) of pentacosa ethylenglycol and 242g (1mole) of pentadecanol under stirring conditions to obtain a uniform blended solution.

Subsequently, the solution in the flask was stirred for 13 hours at 95℃ under conditions to distillation to remove a ethanol and benzene as the byproduct and to obtain 2514g (0.99 mole) of a borate ester of polyoxyalkylenes expressed by chemical formula (23).

Then, an antistatic agent (1) consisting 50 parts by weight of borate ester of polyoxyalkylenes expressed by chemical formula (12) and 50 parts by weight of borate ester of polyoxyalkylenes expressed by chemical formula (23) and 15 parts by weight of triethylamine was prepared by mixing the above three components.

In a vessel, 100 parts by weight of a high pressure low density polyethylene (made by Nippon Unicar Company Ltd., melt mass flow rate 10.0g/10 min., density 0.923 g/cm^3) and 0.2 parts by weight of the antistatic agent (1) obtained by the above mentioned method were blended for 5 minutes under room temperature to obtain a mixture. The mixture was thrown into a continuous blending extruder (made

by K. C. K. Company Ltd., machine name K. C. K 80×2-35 VEX type) under conditions of a cylinder temperature of 190 ℃ to produce from the resin composition as a pellet form having length of 3mm and diameter of 3mm. The resin composition was named hereafter antistatic resin composition (1).

Then a tubular film having a thickness of 50 μm thickness was prepared using the antistatic resin composition (1) by an air cooling inflation film processing machine.

The tubular film was named hereafter antistatic tubular film (1).

Subsequently, the antistatic effect following evaluation test was conducted by the following procedures.

The tubular film (1) was left on a table under the condition of 23℃ temperature and 50% RH (Relative Humidity) for three days, then the surface resistivity of the tubular film (1) was measured according to Japanese Industrial Standard K 6911 to find $7.21\times10^{11}\Omega$ resistivity for the outer surface and $1.28\times10^{12}\Omega$ resistivity for the inner surface, which are excellent values compared to that of comparative example 1 as shown below.

The half-life of electrostatic voltage for the tubular film (1) was measured according to Japanese Industrial Standard L1094 to find 1.43 sec. for the outer surface of the film and 1.92 sec. for the inner surface of the film, which are excellent values compared to that of comparative example 1 as shown below.

When 30 days had passed from the day

that resistivity and half-life of ~~elect r ostatic~~ electrostatic voltage were measured, the same tests were conducted to find $9.75\times10^{11}\Omega$ resistivity for outer surface and $4.08\times10^{12}\Omega$ resistivity for inner surface, which were excellent ~~value comparing~~ values compared to comparative example and to find 2.51 sec. half-life of electrostatic voltage for outer surface and 3.11 sec. half-life of electrostatic voltage for inner surface, which was excellent ~~value comparing~~ values compared to that of comparative example 1 as shown below.

Comparative example 1

As an example of conventional type antistatic agent (2), 2 mol of ethyleneoxide added stearylamine was prepared.

In a vessel, 100 parts by weight of a high pressure low density polyethylene (made by Nippon Unicar Company Ltd., melt mass flow ~~Rate~~ rate 10.0g/10 min., density 0.923g/cm^3) and 0.2 parts by weight of a conventional type antistatic agent (2) were blended for 5 minutes under room temperature to obtain a mixture, then the mixture was thrown into a continuous blending extruder (made by K. C. K. Company Ltd., machine name K. C. K 80×2-35 VEX type) under conditions of a cylinder temperature of 190 ℃ to ~~produce~~ form the resin ~~composit-~~ composition ~~i on as~~ into a pellet ~~form~~ having a length of 3mm and a diameter of 3mm.

The resin composition was named ~~h e a r a f-~~ hereafter ~~t e r~~ antistatic resin composition (2).

Then a tubular film having a thickness of 50 μm thickness was prepared using antistatic resin composition (2) and an air cooling inflation film processing machine.

The tubular film was named hearafter antistatic tubular film (2).

Subsequently, the antistatic effect following evaluation test was conducted by following procedures.

The tubular film (2) was left on a table under the conditions of 23℃ temperature and 50% RH (Relative Humidity) for three days, then the surface resistivity of the tubular film (2) was measured according to Japanese Industrial Standard K 6911 to find $8.65\times10^{11}\Omega$ resistivity for the outer surface and $2.45\times10^{12}\Omega$ resistivity for the inner surface, which are inferior or values compared to that of example 1 as shown above.

The half-life of electrostatic voltage for the tubular film (2) was measured according to Japanese Industrial Standard L 1094 to find 9.45 sec. for the outer surface and 10.87 sec. for the inner surface, which are inferior values compared to that of example 1 as shown above.

Example 2

Borate ester of polyoxyalkylenes expressed by chemical formula (8) was obtained by the following synthesis process.

In a 7000 ml flask equipped with three inlet pipes and displaced by nitrogen gas were charged 146g (1 mole) of triethyl

borate [$B(OC_2H_5)_3$], 1.2g of dibutyl tin dilaurate and 50 ml of benzene.

Subsequently, to the solution in the flask was added with 756g (3 mole) of pentylethylenglycol monomethyl ether under stirring condition to obtain uniform blended solution.

Subsequently, the solution in the flask was stirred for 13 hours at 95℃ under distillation conditions to remove by product ethanol and benzene as the and to obtain 758g (0.99 mole) of a borate ester of polyoxyalkylenes expressed by chemical formula (8).

Then, an antistatic agent (3) consisting 1 parts by weight of borate ester of polyoxyalkylenes expressed by chemical formula (8) and 1 parts by weight of polyoxyethylene (9) lauryl amine were prepared by mixing the above two components.

In a vessel, 100 parts by weight of a high pressure low density polyethylene (made by Nippon Unicar Company Ltd., melt mass flow rate 10.0g/10 min., density 0.923g/cm^3) and 0.2 parts by weight of the antistatic agent (3) obtained by above mentioned method were blended for 5 minutes under room temperature to obtain mixture, then the mixture was thrown into a continuous blending extruder (made by K.C.K. Company Ltd., machine name K.C.K 80×2-35 VEX type) under conditions of a cylinder temperature of 190 ℃ to form the resin composition into pellets having a length of 3mm and a diameter of 3mm.

The resin composition was named hereafter antistatic resin composition (3). Then a tubular film having a thickness of 50 μm thickness was prepared using antistatic resin composition (3) and an air cooling inflation film processing machine.

The tubular film was named hearafter antistatic tubular film (3).

Subsequently, the antistatic effect following evaluation test was conducted by the following procedures.

The tubular film (3) was left on a temperature table under the condition of 23℃ temperature and 50% RH (Relative Humidity) for three days. Then the surface resistivity for the tubular film (3) was measured Standard according to Japanese Industrial Standard K 6911 to find $5.78\times10^{11}\Omega$ resistivity for the outer surface and $0.97\times10^{12}\Omega$ resistivity for the inner surface, which were excellent value comparing to that of example 1 .

The half-life of electrostatic voltage for the tubular film (3) was measured Standard according to Japanese Industrial Standard L 1094 to find 1.18 sec. for the outer surface and 1.76 sec. for the inner surface, which are excellent value comparing to that of example 1 .

When 30 days had passed from the day that resistivity and half-life of electrostatic voltage were measured, the same tests were conducted to find $7.67\times10^{11}\Omega$ resistivity for the outer surface and $3.89\times10^{12}\Omega$ resistivity for the inner surface, which are excellent value comparing to

example 1 and to find 2.12sec. half-life of electrostatic voltage for the outer surface and 2.69 sec. half-life of electrostatic voltage for the inner surface, which are excellent values compared to that of example 1.

The experimental results showed that the antistatic agent of the present invention had excellent properties and that its surface resistivity was a low value and its half-life of electrostatic voltage was a short time.

Low surface resistivity of the plastic film means that the plastic film will hardly be charged with static electricity, so that the plastic film will not adsorb the dust in the surrounding areas.

Short half-life of electrostatic voltage means that the durable term of the antistatic effect of the plastic film is long.

Also, the surface of the plastic film made by the resin compound of the present invention does not show sticky touch feeling.